



FAMILY OWNED AND OPERATED SINCE 1933

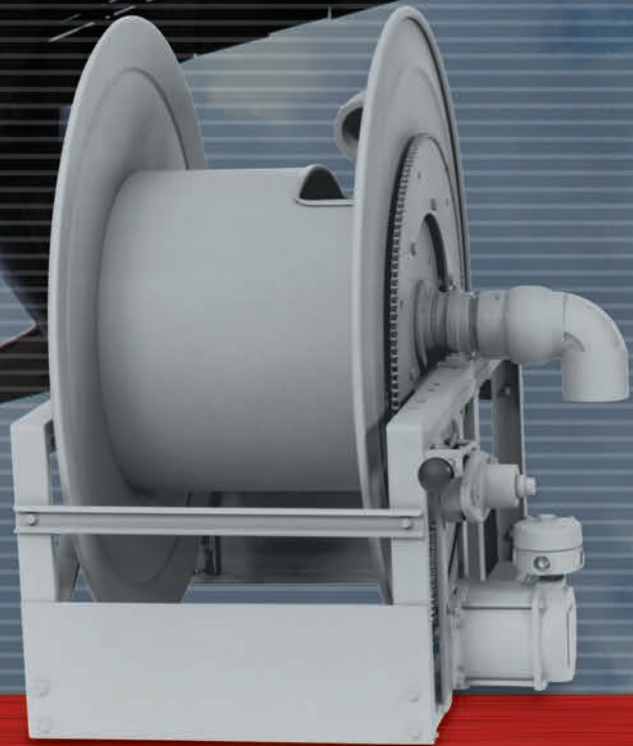

Hannay Reels®
The reel leader.

Aviation Reels

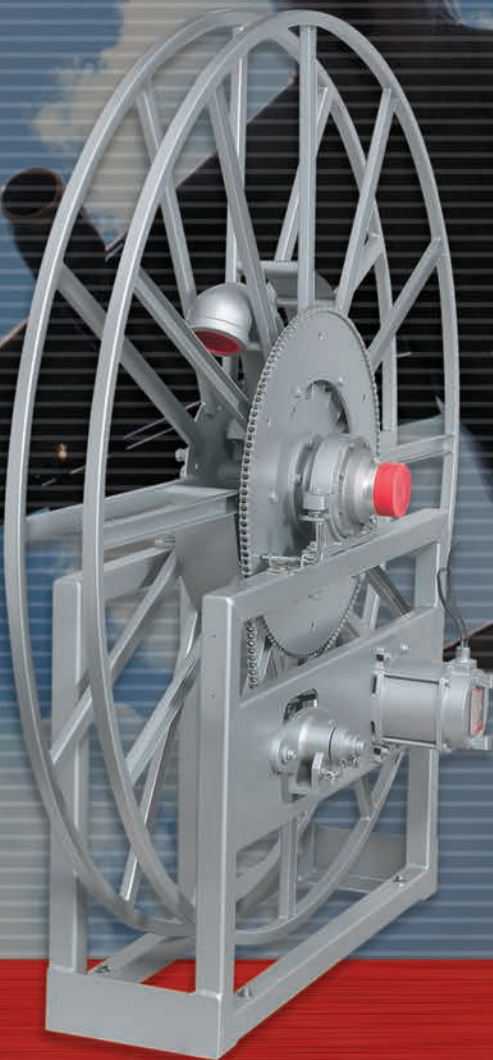

**You
Can't Buy
A Better
Reel**

Refueling • Airport Hydrant Fueling Operations
Sensing • Static Grounding

www.hannay.com

Pride in workmanship • Reels built to order • Consistent quality • Service with integrity • Value for your dollar

Note to Designers and Engineers:

The reels shown in this catalog are the standard of the industry. These models reflect various installation and performance requirements.

The high quality of our standard steel construction is only the beginning.

Hannay Reels offers any size configuration to fit a defined space, and we construct many models of reels of aluminum or stainless steel. Specifically, we use 5000 and 6000 Series aluminum and 304 stainless steel in the manufacture of frames, discs, drums and internals as well as other structural components. This type of construction eliminates the need for maintenance repainting and part replacement due to rust or corrosion.

The drum diameters of the reel models listed have been used successfully for many years. However if your application requires a larger drum diameter to meet **API hose standards**, please remember it will also *increase the envelope dimensions* for the reel and *may incur an extra cost*.

Please note: Jet fuels require non-ferrous internal piping. Hannay Reels offers aluminum or stainless steel internals for 1" to 4" I.D. hose reels.

Please consult factory on any fuel handling questions.

For the many accessories and components available on our standard reel models such as roller guides, switches, brakes and locks, etc., please refer to our Ordering & Accessory Guide H-0415-OA.

Paint Notice

To meet the requirements and performance of vehicle and OEM apparatus paints we recommend our reels be painted with the same or equal paint as used on the specific apparatus the reel is being mounted on.

Hannay Reels will supply any model or custom reel or part with an automotive primer upon request, allowing application of final coating at your facility. Or at additional cost Hannay can prime / pre-paint all material before final assembly.

Consult factory for other optional finishes

Standard finish is oven cured enamel. High performance finishes for demanding and corrosive environments are available at an additional cost. Consult factory for specific requirements.


S E R I E S

1 1/2"

MANUAL OR POWER REWIND REELS

To handle single 1" through 1-1/2" I.D. hose.

- A strong, heavy-duty reel.
- Gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Optional auxiliary crank rewind for power rewind reels.
- Crank rewind reels supplied with pinion brake and power rewind reels with a comet brake.
- 90° ball bearing swivel joint with 1-1/2" female NPT threads and 2" victaulic groove.
- Flanged riser with 1-1/2" female NPT threads.
- Other sizes and/or threads can be furnished and must be specified.
- Standard inlet, outlet riser, hub assembly are aluminum for jet fuels.
- Stainless steel, at extra cost.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 600 psi (41 bar)
- Temperatures from -40°F to +175°F (-40° C to +79° C).
- Consult factory for other pressures & temps.
- Chainguards are available upon request, must be specified.

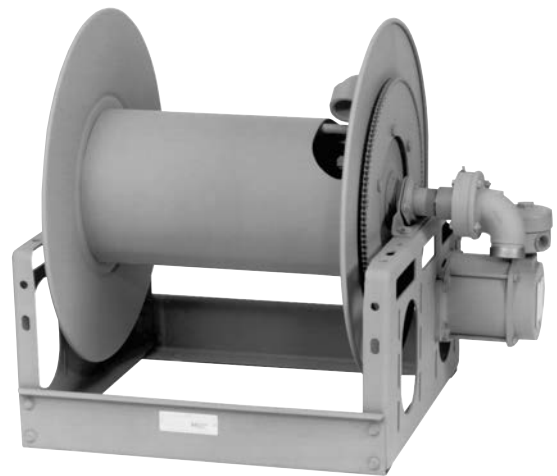

Standard Configuration
Shown

Hannay Reels, Inc. Phone 518-797-3791 Toll Free 1-877-GO REELS (467-3357)

FAX 1-800-REELING (733-5464) USA or FAX 518-797-3259 (International) www.hannay.com reels@hannay.com

Parts Drawing – ISO 18

Model Number	Hose Capacity of Reel feet m.					Approx. Weight Crank Rewind lb. kg. See Note 4		Reel Dimensions*** inches mm.									
	I.D. (in) I.D. (mm)	1" 25	1-1/4" 32	1-3/8" 35	1-1/2" 38	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y
	O.D. (in) O.D. (mm)	1.58" 40	1.89" 48	2" 51	2.06" 52												
26-19-21		70 21	60 18	50 15	50 15	99 45	141 64	23 584	17.5 445	20.5 521	18.75 476	29.5 749	31.88 810	21.5 546	12.12 308	15 381	16.75 425
32-19-21		100 30	90 27	85 26	75 23	112 51	154 70	29.5 749	24 610	20.5 521	18.75 476	36.0 914	38.38 975	21.5 546	12.12 308	21.5 546	16.75 425
40-19-21		125 38	100 30	100 30	100 30	128 58	170 77	37.5 953	32 813	20.5 521	18.75 476	44.0 1118	46.38 1178	21.5 546	12.12 308	29.5 749	16.75 425
24-23-24		100 30	90 27	80 24	50 15	102 46	144 65	21 533	15.5 394	20.5 521	22.75 578	27.5 699	29.88 759	23.5 597	12.12 308	13 330	16.75 425
32-23-24		150 46	150 46	125 38	75 23	119 54	161 73	29.5 749	24 610	20.5 521	22.75 578	36.0 914	38.38 975	23.5 597	12.12 308	21.5 546	16.75 425
38-23-24		200 61	190 58	170 52	100 30	130 59	172 78	35 889	29.5 749	20.5 521	22.75 578	41.5 1054	43.88 1115	23.5 597	12.12 308	27 686	16.75 425
20-25-26		110 34	70 21	60 18	50 15	106 48	148 67	17 432	11.5 292	25.5 648	24.75 629	23.5 597	25.88 657	27.88 708	15.5 394	9 229	21.75 552
24-25-26		140 43	95 29	85 26	75 23	114 52	156 71	21 533	15.5 394	25.5 648	24.75 629	27.5 699	29.88 759	27.88 708	15.5 394	13 330	21.75 552
28-25-26		200 61	130 40	120 37	100 30	123 56	165 75	25.5 648	20.0 508	25.5 648	24.75 629	32.0 813	34.38 873	27.88 708	15.5 394	17.5 445	21.75 552
16-30-31		90 27	50 15	50 15	50 15	106 48	156 71	13 330	7.5 191	25.5 648	28.75 730	19.5 495	21.88 556	29.88 759	15.5 394	7.75 197	21.75 552
20-30-31		155 47	140 43	80 24	75 23	114 52	164 74	17 432	11.5 292	25.5 648	28.75 730	23.5 597	25.88 657	29.88 759	15.5 394	9 229	21.75 552
*22-30-31		185 56	160 49	100 30	100 30	118 54	168 76	19 483	13.5 343	25.5 648	28.75 730	25.5 648	27.88 708	29.88 759	15.5 394	11 279	21.75 552
*28-30-31		275 84	250 76	175 53	150 46	131 59	181 82	25.5 648	20.0 508	25.5 648	28.75 730	32.0 813	34.38 873	29.88 759	15.5 394	17.5 445	21.75 552
*24-33-34		275 84	190 58	175 53	175 53	129 59	179 81	20.5 521	15.5 394	31.5 800	31.75 806	27.25 692	29.63 753	33.62 854	17.75 451	13 330	27.75 705


Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)/(kg.)	Ship (lbs.)/(kg.)
Electric	40/18.1	40/18.1
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1
- When ordering power rewind models, prefix model number with:
A = Air Rewind–Supplied with control valve and 18 " air hose.
EPJ = Explosion Proof Electric Rewind (1/2 HP)–Supplied with explosion proof switch, solenoid, and junction box.
HD = Hydraulic Rewind–Not supplied with control valve.
- For Air Rewind on models over 100 ft. of 1-1/2" consult factory.

7. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

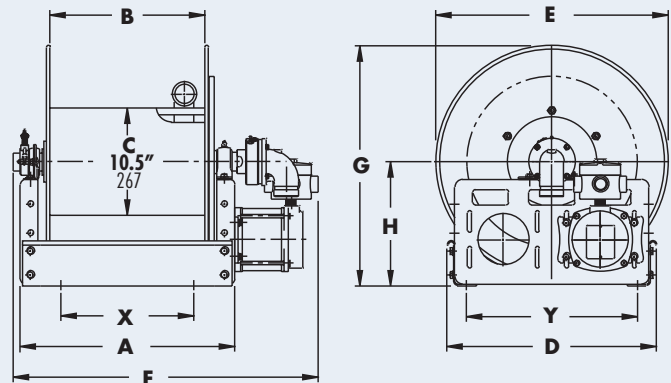

* Some applications may require a different motor and/or a clutch/reduction unit.

***x,y indicate mounting holes.

2"


MANUAL OR POWER REWIND REELS

To handle single 1-1/2" or 2" I.D. hose.

- Gear-driven crank rewind, or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Optional auxiliary crank rewind for power reels.
- Crank rewind reels supplied with pinion brake and power rewind reels with a comet brake.
- 90° ball bearing swivel joint with 2" victaulic.
- Flanged riser with 2" female NPT threads.
- Other sizes and/or threads can be furnished and must be specified.
- Standard inlet, riser, hub assembly are aluminum for jet fuels.
- Stainless steel, at extra cost.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 150 psi (10 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures & temps.



Standard Configuration Shown

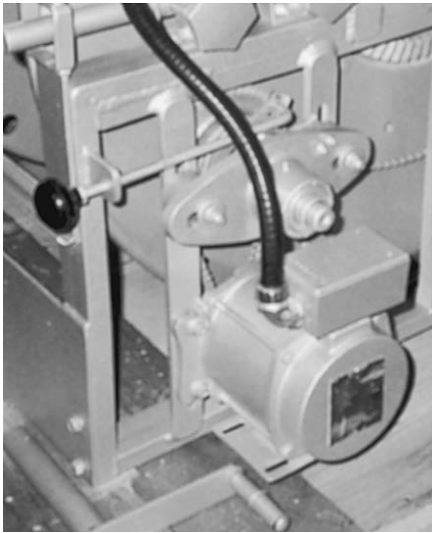

Chain Clutch - Reduction Units

- Recommended on reels with 39" diameter or larger discs, or when increased torque, and slower rewind speeds are required.
- Factory-installed.

Parts Drawing – ISO 35

Model Number	Hose Capacity of Reel feet m.			Approx. Weight Crank Rewind lb. kg. See Note 3		Reel Dimensions*** inches mm.									
	I.D. (in) I.D. (mm)	1-1/2" 38	2" 51	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y
	O.D. (in) O.D. (mm)	2.06" 52	2.67" 68												
232-26-27		70 21	50 15	104 47	154 70	23.75 603	17.5 445	27 686	25.75 654	31 787	32.75 832	26.62 676	13.75 349	16.25 413	23.25 591
238-26-27		100 30	75 23	145 66	195 88	30.25 768	24 610	27 686	25.75 654	37.5 953	39.25 997	26.62 676	13.75 349	22.75 578	23.25 591
246-26-27		140 43	100 30	196 89	246 112	38.25 972	32 813	27 686	25.75 654	45.5 1156	47.25 1200	26.62 676	13.75 349	30.75 781	23.25 591
224-33-34		60 18	50 15	70 32	140 64	15.75 400	9.5 241	31.5 800	31.75 806	23 584	24.75 629	33.38 848	17.5 445	8.25 210	27.75 705
228-33-34		100 30	75 23	92 42	162 73	19.75 502	13.5 343	31.5 800	31.75 806	27 686	28.75 730	33.38 848	17.5 445	12.25 311	27.75 705
234-33-34		140 43	100 30	133 60	203 92	26.25 667	20 508	31.5 800	31.75 806	33.5 851	35.25 895	33.38 848	17.5 445	18.75 476	27.75 705
232-39-40		250 76	150 46	180 82	250 113	23.75 603	17.5 445	40 1016	39 991	31 787	32.75 832	39.88 1013	20.38 518	16.25 413	37 940
240-39-40		350 107	200 61	218 99	288 131	32.25 819	26 660	40 1016	39 991	39.5 1003	41.25 1048	39.88 1013	20.38 518	22.75 578	37 940

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:


	Net (lbs.)/(kg.)	Ship (lbs.)/(kg.)
Electric	40/18.1	40/18.1
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1

- When ordering power rewind models, prefix model number with:
A = Air Rewind–Supplied with control valve and 18" air hose.
EPJ = Explosion Proof Electric Rewind (1/2 HP)–Supplied with explosion proof switch, solenoid, and junction box.
HD = Hydraulic Rewind–Not supplied with control valve.

5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

***x,y indicate mounting holes.

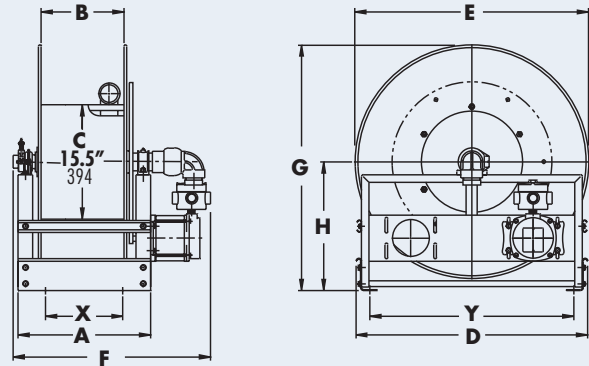


3"


MANUAL OR POWER REWIND REELS

To handle 2" through 3" I.D. hose.

- Rugged, industrial-duty channel frame construction.
- Gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Pinion shaft brake as auxiliary crank rewind on power reels, at extra cost.
- Crank rewind supplied with pinion brake, power reels with comet brake. Other brakes and locking devices may be specified.
- 90° ball bearing swivel joint with 3" victaulic groove.
- Flanged riser with 3" female NPT threads.
- Consult factory for other sizes and/or threads.
- Standard inlet, outlet riser and hub assembly are aluminum for jet fuels.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 150 psi (10 bar)
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures and temperatures.

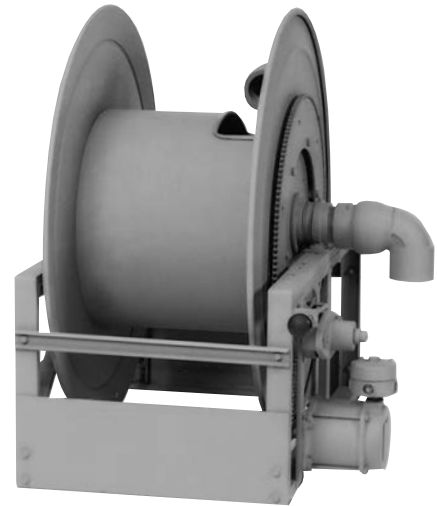

Shown with Clutch-Reduction unit

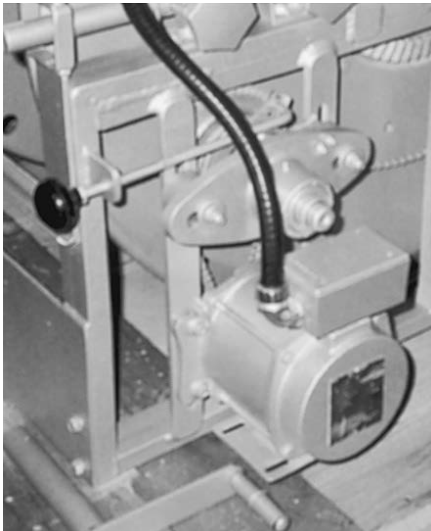

Chain Clutch - Reduction Units

- Standard on reels with 39" diameter or larger discs, or when increased torque and slower rewind speeds are required.
- Factory-installed.

3"

Parts Drawing – ISO 57

Model Number	Hose Capacity of Reel				Approx. Weight Crank Rewind See Note 3 <div>lb. kg.</div>		Reel Dimensions***											
	<div>feet m.</div>						<div>inches mm.</div>											
For Power Rewind See Notes 3 & 4	I.D. (in) I.D. (mm)	2" 51	2-1/2" 64	3" 76	NET	SHIP	A	B	C	D	E	F CRANK	F POWER	G	H	X	Y	
	O.D. (in) O.D. (mm)	2.67 68	3.25 83	3.78 96														
334-26-27		50 15	*25 8	— —	116 53	166 75	26.25 667	20 508	15.5 394	27 686	27.38 695	35.75 908	36.25 921	27.12 689	14.25 362	18.75 476	23.25 591	
340-26-27		85 26	*35 11	— —	153 69	203 92	32.25 819	26 660	15.5 394	27 686	27.38 695	41.75 1060	42.25 1073	27.12 689	14.25 362	24.75 629	23.25 591	
350-26-27		100 30	*50 15	— —	213 97	340 155	42.25 1073	36 914	15.5 394	27 686	27.38 695	51.75 1314	52.25 1327	27.12 689	14.25 362	34.75 883	23.25 591	
332-33-34		70 21	25 8	25 8	125 57	195 88	23.75 603	17.5 445	20 508	31.5 800	31.75 806	33.25 845	33.75 857	33.88 861	18 457	16.25 413	27.75 705	
346-33-34		140 43	50 15	50 15	237 108	307 139	38.25 972	32 813	20 508	31.5 800	31.75 806	47.75 1213	48.25 1226	33.88 861	18 457	30.75 781	27.75 705	
332-39-40		120 37	65 20	50 15	201 91	271 123	23.75 603	17.5 445	20 508	40 1016	39 991	33.25 845	33.75 857	40.38 1026	20.88 530	16.25 413	37 940	
338-39-40		185 56	90 27	80 24	239 108	309 140	30.25 768	24 610	20 508	40 1016	39 991	39.75 1010	40.25 1022	40.38 1026	20.88 530	22.75 578	37 940	
334-45-46		200 61	120 37	100 30	361 164	431 195	26.25 667	20 508	20 508	46 1168	45 1143	35.75 908	36.25 921	46.38 1178	23.88 607	18.75 476	43 1092	

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)/(kg.)	Ship (lbs.)/(kg.)
Electric	40/18.1	40/18.1
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1


- When ordering power rewind models, prefix model number with:
A = Air Rewind—Supplied with control valve and 18" air hose.
EPJ = Explosion Proof Electric Rewind (1/2 HP)—Supplied with explosion proof switch, solenoid, and junction box.
HD = Hydraulic Rewind—Not supplied with control valve.

5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*Be sure to verify bend radius of hose before ordering.

***x, y indicate mounting holes.

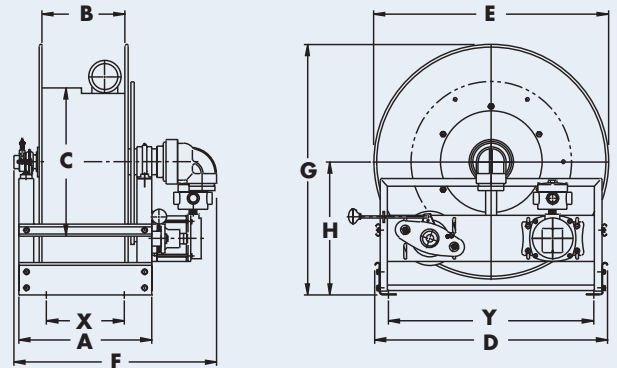


4"


MANUAL OR POWER REWIND REELS

To handle 3" or 4" I.D. hose.

- Rugged, industrial-duty channel frame construction.
- Gear-driven crank rewind, or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Pinion shaft brake as auxiliary on power reels, at extra cost.
- Crank rewind reels supplied with pinion brake, power reels with comet brake. Other brakes and locking devices may be specified.
- 90° ball bearing swivel joint with 4" female NPT threads.
- Flanged riser with 4" female NPT threads.
- Consult factory for other sizes and/or threads.
- Standard outlet riser and hub assembly are steel with iron inlet swivel joint. For jet fuels can be supplied in stainless steel, at extra cost.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 150 psi (10 bar)
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures and temperatures.

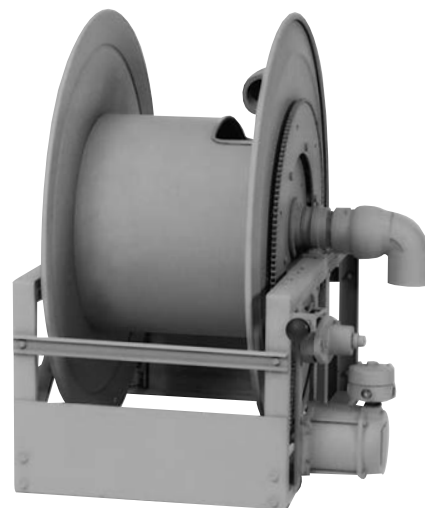

Standard Configuration Shown

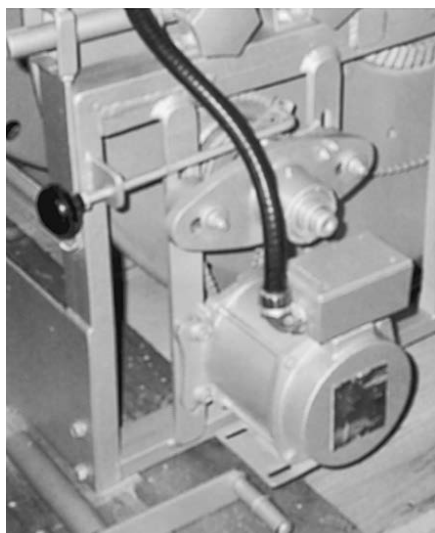

Chain Clutch - Reduction Units

- Standard on all 4" Series reels for increased torque and slower rewind speeds as required.

4"

Parts Drawing – ISO 75

Model Number	Hose Capacity of Reel			Approx. Weight Crank Rewind See Note 3		Reel Dimensions***										
	feet m.			NET	SHIP	inches mm.										
	I.D. (in) I.D. (mm)	3" 76	4" 102			A	B	C	D	E	F CRANK	F POWER	G	H	X	Y
For Power Rewind See Notes 2 & 3	O.D. (in) O.D. (mm)	3.78 96	5 127													
426-52-54-36		60 18	— —	255 116	325 147	18.50 470	11.5 292	36 914	53 1346	52 1321	29.75 756	29.25 743	55 1397	29 737	11 279	50 1270
430-52-54-36		85 26	30 9	275 125	345 156	22.50 572	15.5 394	36 914	53 1346	52 1321	33.75 857	33.25 845	55 1397	29 737	15 381	50 1270
434-52-54-36		100 30	40 12	290 132	360 163	27 686	20 508	36 914	53 1346	52 1321	38.25 972	37.75 959	55 1397	29 737	19.50 495	50 1270
426-56-58-36		40 12	— —	290 132	360 163	18.50 470	11.5 292	36 914	57 1448	56 1422	29.75 756	29.25 743	58 1473	30 762	11 279	54 1372
430-56-58-36		50 15	40 12	305 138	375 170	22.50 572	15.5 394	36 914	57 1448	56 1422	33.75 857	33.25 845	58 1473	30 762	15 381	54 1372
434-56-58-36		65 20	55 17	325 147	395 179	27 686	20 508	36 914	57 1448	56 1422	38.25 972	37.75 959	58 1473	30 762	19.50 495	54 1372

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

	Net (lbs.)/(kg.)	Ship (lbs.)/(kg.)
Electric	40/18.1	40/18.1
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1


- When ordering power rewind models, prefix model number with:
A = Air Rewind—Supplied with control valve and 18" air hose.
EPJ = Explosion Proof Electric Rewind (1/2 HP)—Supplied with explosion proof switch, solenoid, and junction box.
HD = Hydraulic Rewind—Not supplied with control valve.

5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*Be sure to verify bend radius of hose before ordering.

***x, y indicate mounting holes

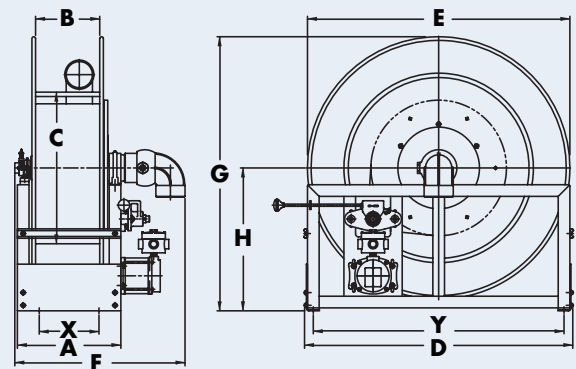

5000

SINGLE WRAP POWER REWIND REELS

To handle single 1-1/2" I.D. through 3" I.D. hose.

- Effortless and fast rewinding, wrapping, guiding of hose.
- Chain and sprocket drive powered by electric, hydraulic, or compressed air motor.
- Auxiliary crank rewind, optional.
- 12 volt rewind, comet brake, reduction unit standard.
- Air brake optional.
- Inlet, hub assembly is aluminum and/or stainless steel for jet fuel.
- Consult factory for other pressures & temps.

Series 5100

- 90° ball bearing swivel joint 1-1/2" female NPT threads, 2" victaulic groove, flanged riser with 1-1/2" female NPT threads.
- Pressures to 600 psi (41 bar).
- Temperatures from -40° F to +175° F (-40° C to +79° C).

Series 5200

- 90° ball bearing swivel joint 2" victaulic groove, flanged riser with 2" female NPT threads.
- Pressures to 150 psi (10 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).

Series 5300

- I-hub straight 3" victaulic groove inlet, flanged riser with 3" female NPT threads.
- Pressures to 150 psi (10 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Optional 90° ball bearing alum swivel joint 3" victaulic groove, flanged riser with 3" female NPT threads.
- Optional I-hub joints are available in:
 - 3" straight flanged
 - 3" 90° flanged
 - 3" straight victaulic
 - 3" 90° victaulic



Standard Model Shown
(Hose not included)



Standard Configuration
5300 Series



Standard Victaulic Version
I-hub for 5300 Series

5000

Parts Drawing – ISO 197


Model Number	Hose Capacity of Reel feet m.					Approx. Weight lb. kg.		Reel Dimensions inches mm.							
	I.D. (in) I.D. (mm)	1-1/2" 38	2" 51	2-1/2" 64	3" 76	NET	SHIP	A	B	C	E	F POWER	F POWER with I-Hub	G	H
	O.D. (in) O.D. (mm)	2.06 52	2.67 68	3.25" 83	3.78" 96										
5111-48-50-20		50 15	—	—	—	310 141	385 175	10.63 270	2.75 70	20 508	48 1219	17.5 445	—	50 1270	26 660
5111-56-58-20		75 23	—	—	—	330 150	405 184	10.63 270	2.75 70	20 508	56 1422	17.5 445	—	58 1473	30 762
5111-62-64-20		100 30	—	—	—	340 154	415 188	10.63 270	2.75 70	20 508	62 1575	17.5 445	—	64 1626	33 838
5111-72-74-20		130 40	—	—	—	350 159	425 193	10.63 270	2.75 70	20 508	72 1829	17.5 445	—	74 1880	38 965
5218-56-58-24		—	50 15	—	—	370 168	445 202	11.50 292	3.63 92	24 610	56 1422	19.25 489	—	58 1473	30 762
5218-62-64-24		—	75 23	—	—	390 177	465 211	11.50 292	3.63 92	24 610	62 1575	19.25 489	—	64 1626	33 838
5218-70-72-24		—	100 30	—	—	400 181	475 215	11.50 292	3.63 92	24 610	70 1778	19.25 489	—	72 1829	37 940
5319-62-64-30		—	—	50 15	50 15	400 182	475 216	12.25 311	4.38 111	30 762	62 1575	21.25 540	20.50 521	64 1626	33 838
5319-70-72-30		—	—	75 23	—	410 186	485 220	12.25 311	4.38 111	30 762	70 1778	21.25 540	20.50 521	72 1829	37 940
5319-78-80-30		—	—	100 30	—	420 191	495 225	12.25 311	4.38 111	30 762	78 1981	21.25 540	20.50 521	80 2032	41 1041

Notes:


- Specifications subject to change.
- When ordering power rewind models, prefix model number with:
A = Air Rewind EP = Electric Rewind (1/2 HP) HD = Hydraulic Rewind
(Air rewind reels are supplied with control valve and 18" air hose;
12v and 24v DC rewind reels are supplied with switch and solenoid;
hydraulic rewind reels are not supplied with control valve.)

3. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

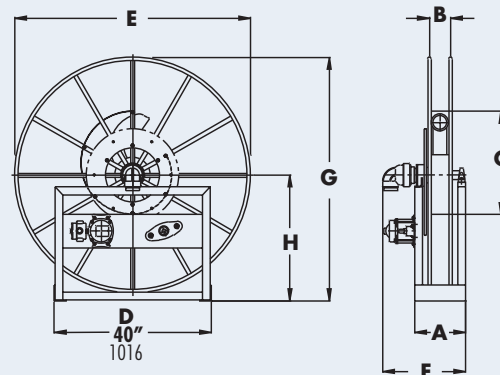

Series 5100 and 5200

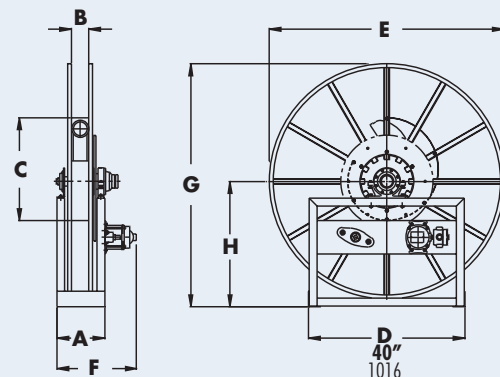


Series 5300

N600

SPRING REWIND DUAL HOSE REELS

To handle dual 1/4" through 3/8" I.D. sensing hose.

- Narrow frame and compact mounting base.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets 90° balanced pressure swivel joints 1/2" female NPT threads.
- Standard outlets 1/2" female NPT threads.
- Pressures to 3000 psi (207 bar)
- Temperatures from -60° F to +250° F (-51°C to +121°C).
- Consult factory for other pressures & temps.
- 4-way roller assembly. Specify roller position.
- Constant Tension is available – consult factory.

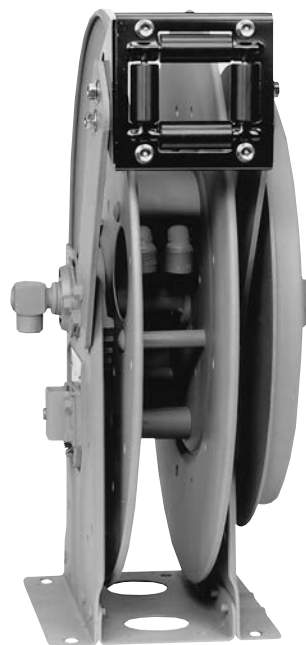

Optional
TR roller
position
shown

Parts Drawing – ISO 80

Model Number	Hose Capacity of Reel feet m.			Approx. Weight lb. kg.			Standard Roller Assy	Reel Dimensions*** inches mm.							
	I.D. (in) I.D. (mm)	1/4" 6	3/8" 10	NET	UPS/ FedEx	Freight		A	B	C	E	F	G	H	X
	O.D. (in) O.D. (mm)	.53" 13	.66" 17		SHIP Wt.	SHIP Wt.									
N617-19-20-10.5J		2/50 2/15	2/50 2/15	66 30	84 38	101 46	N205	11 279	5 127	10.5 267	20.75 527	13.75 349	20 508	10.62 270	9 229
N617-23-24-10.5G		2/100 2/31	2/100 2/31	73 33	84 38	108 49	N205	11 279	5 127	10.5 267	23.75 603	13.75 349	24 610	12.62 321	9 229



Notes: A hose stop is necessary on hose to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*Dimensional weight applies when shipped as a parcel package (via Fed-Ex or UPS Ground).

*** x,y indicate mounting holes.

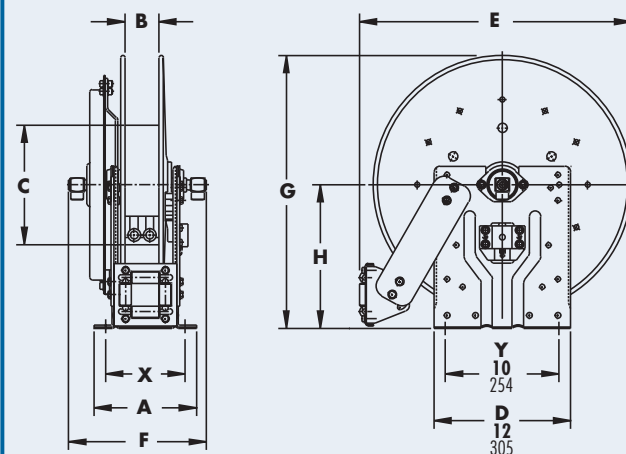


Available Roller Positions

900

SPRING REWIND REELS

To handle 1-1/4" or 1-1/2" I.D. hose.

- Rollformed channel frame construction.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet 90° swivel joint 1-1/2" female NPT threads and 2" victaulic groove.
- Standard outlet 1-1/2" female NPT threads.
- Consult factory for other sizes and/or threads.
- Standard inlet, outlet riser, and hub assembly are aluminum for jet fuels.
- Pressures to 600 psi (41 bar)
- Temperatures from -25° F to +400° F (-32° C to +204° C).
- Consult factory for other pressures & temps.
- 4-way roller assembly.
- Constant Tension is available – consult factory.

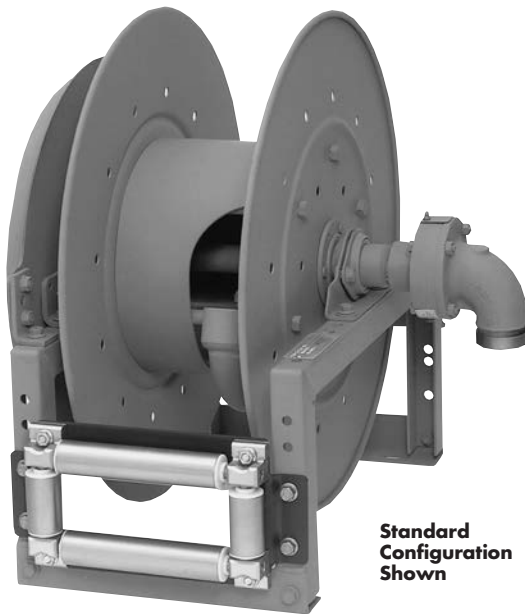

Standard Configuration Shown

Parts Drawing – ISO 29

Model Number	Hose Capacity of Reel feet m.			Weight lb. kg.		Standard Roller Assy	Reel Dimensions*** inches mm.								
	I.D. (in) I.D. (mm)	1-1/4" 32	1-1/2" 38	NET	SHIP		A	B	D	E	F	G	H	X	Y
	O.D. (in) O.D. (mm)	1-13/16" 46	2-1/16" 52												
922-23-24B		40 12	25 8	104 47	139 63	R310	15.25 387	10 254	23.25 591	25.25 641	24 610	23.88 607	12.5 318	10.5 267	20 508
920-25-26A		50 15	40 12	127 58	162 73	R308	13.25 337	8 203	25 635	27 686	22.75 578	25.88 657	13.5 343	8.5 216	21.75 552
922-30-31A		75 23	50 15	156 71	191 87	R310	15.25 387	10 254	28.5 724	30.5 775	24.75 629	31.38 797	17 432	10.5 267	25.25 641



Notes: A hose stop is necessary on hose to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.

4. Be sure to check dimensions and weights prior to ordering.

NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

*** x,y indicate mounting holes.

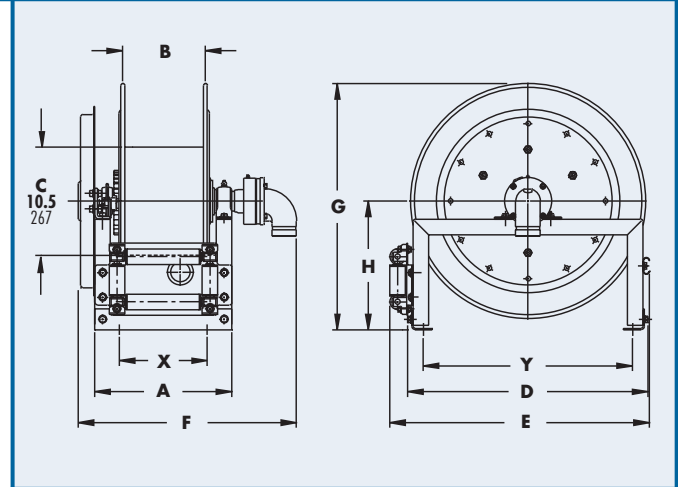

STATIC GROUNDING REELS

FOR REFUELING OR HAZARDOUS AREAS

- Aircraft Refueling • Chemical Plants
- Grain Elevators • Rescue and HazMat Operations

- These reels bond and/or ground aircraft, fuel trucks and other equipment.
 - Provide smooth operation and require minimum cable pull.
 - Declutching arbor and adjustable guide arm with cable guide.
 - Optional stainless steel construction of spool, frame & ratchet system available on HGR series.
 - Standard finish is oven-cured enamel.
 - Also available, manual rewind version.
- All shown with optional cable and/or "Y" branch.

WARNING

These Reels are for Static Grounding ONLY
NOT intended for lightning protection!



Optional Grounding Jack
per MIL-C-8341D/4
Part No. 9951.0033



Optional Browne Clamp
Part No. 9951.0031
(ALS-10)



Model HGR 50
(shown with optional "Y" branch)



Model HGR 50



Model HGR100



Model MHGR 50



Model GR 75



Model MGR 75

GR/HGR

- Available with 1/8", 7x19 galvanized carbon steel cable
- 100 amp Alligator Clamp.
- Stainless steel or plastic-covered cable and "Y" branches are available at an additional charge.
- Cable guide arm of cast aluminum and 2A+12 Alum Zinc Alloy.

Series GR75

- Sealed spring is a good economical choice compact and lightweight.

Series HGR



- A non-sparking ratchet assembly.
- Reels are repairable and parts are readily available.
- Supplied with 18" long grounding strap with eyelet connectors on both ends.

Parts Drawing: HGR Series – ISO 10

Model Number	Cable Capacity of Reel feet m.	Approx. Weight lb. kg		Reel Dimensions*** inches mm									
		Without cable	With cable	A	B	C	D	E	F	G	H	X	Y
GR 75	75 23	11 5	14* 6	2 51	2 51	7 178	9 229	9.25 235	3.5 89	9.88 251	5.06 129	1 25	7.88 200
MGR 75	100 30	11 5	13* 6	2 51	2 51	7 178	9 229	9.25 235	5.25 133	9.88 251	5.06 129	1 25	7.88 200
HGR 50	75 23	28 13	30* 14	4 102	1.25 32	10.75 273	11.5 292	14.25 362	5.5 159	16.75 425	8.88 226	2.38 60	7.5 191
MHGR 50	150 46	19 9	23* 10	4 102	1.25 32	10.75 273	11.5 292	14.25 362	6.25 159	16.75 425	8.88 226	2.38 60	7.5 191
HGR 100	100 30	37 17	41* 19	4 102	1.25 32	13.25 337	11.5 292	16.75 425	5.5 140	17.75 451	8.88 226	2.38 60	7.5 191
MHGR 100	200 61	25 11	31* 14	4 102	1.25 32	13.25 337	11.5 292	16.75 425	6.25 159	17.75 451	8.88 226	2.38 60	7.5 191

Notes:

1. Specifications subject to change.
 2. When ordering, specify model number, gauge, OD, length and coating if required.
 3. Specify Y branch if required.
 4. Specify Finish: if other than standard.
- *** x,y indicate mounting holes.

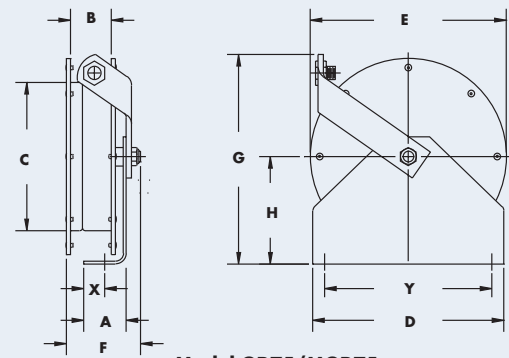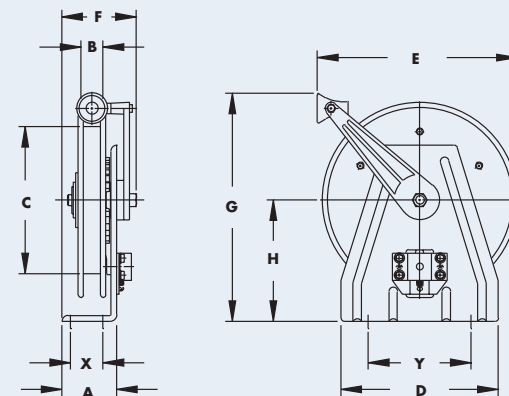Model GR75/MGR75
GR75 ShownModels HGR50/HGR100/MHGR50
HGR Shown



Family owned and operated since 1933, Hannay Reels is the world leader in both OEM and aftermarket applications. Hannay offers thousands of standard hose reel and cable reel models, as well as unmatched custom capabilities. We can easily and affordably customize a reel to meet your exact specifications – built to last, delivered fast. Additional catalogs are available through your local Hannay Reels dealer or online at www.hannay.com.



553 State Route 143 • Westerlo, New York 12193
Toll Free Phone: 1-877-GO REELS • Toll Free Fax: 1-800-REELING

E-mail: reels@hannay.com

Intl. Phone: 1-518-797-3791 • Intl. Fax: 1-518-797-3259

www.hannay.com



MADE IN U.S.A.